


PUMP DISCHARGE: AS CAST
 TO SUIT BOTH 250mm AS2129 "E" AND 250mm ANSI "CL 150"
 250mm AS2129 "E" 12 - 22.000Ø (M20) E/S ON 356.000 PCD
 250mm ANSI "CL150" 12 - 26.000Ø (M24) E/S ON 362.000 PCD


PUMP SUCTION: 300mm ANSI "CL 150"
 12 - M24 x 3.0P TAPPED BLIND HOLES E/S ON 432.000PCD
 50.000 FULL THRD.

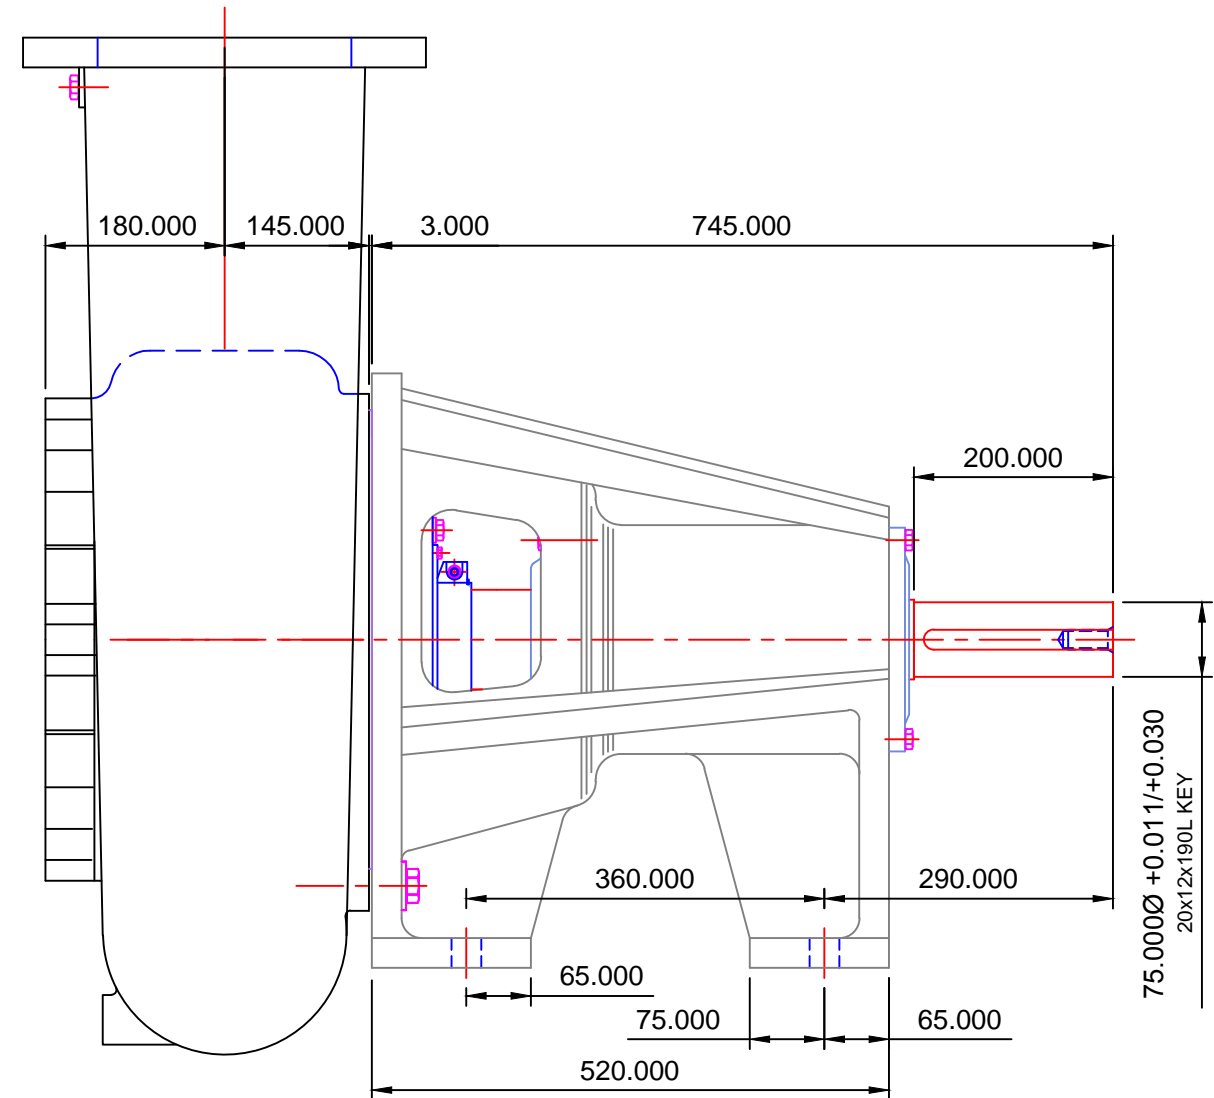

STANDARD DETAIL NOTES:

THIS IS A DIAGRAMMATIC REPRESENTATION AND CERTAIN DETAILS REMOVED FOR CLARITY.
IMPORTANT: ALL DIMENSIONS INDICATED ARE NOMINAL.

IMPORTANT:
 THIS DATA IS RELEASED FOR
 REFERENCE ONLY.

REVISION	THIS DATA REMAINS THE PROPERTY OF STALKER ENGINEERING. NO DATA MAY BE REPRODUCED WITHOUT PRIOR CONSENT OF COMPANY. DATA MAY BE ALTERED WITHOUT NOTIFICATION.		GENERAL TOLERANCES METRIC +/-0.400mm INCH +/-0.015" FABR +/-2.0mm		DRWN: AR	 STALKER PUMPS www.stalkerpumps.com.au DIMENSION OUTLINE DIAGRAMMATIC 300/250-400 SHD DC SERIES ANSI CL "150" FLANGES DRAWING No: 9300--39EDIM REPLACES 9300--39(002DIM).dwg
	"IF IN DOUBT ASK"		FILE REFERENCE: 9300--39A150DIM.dwg (A3)		DATE: 17/10/2012	
	"DO NOT SCALE"		APPRVD:		SCALE: NTS	
(A) 17/10/2012 INITIAL RELEASE (AR)			CHECKED: (AR) 17/10/2012	REVISION: (A) 17/10/2012	A	