



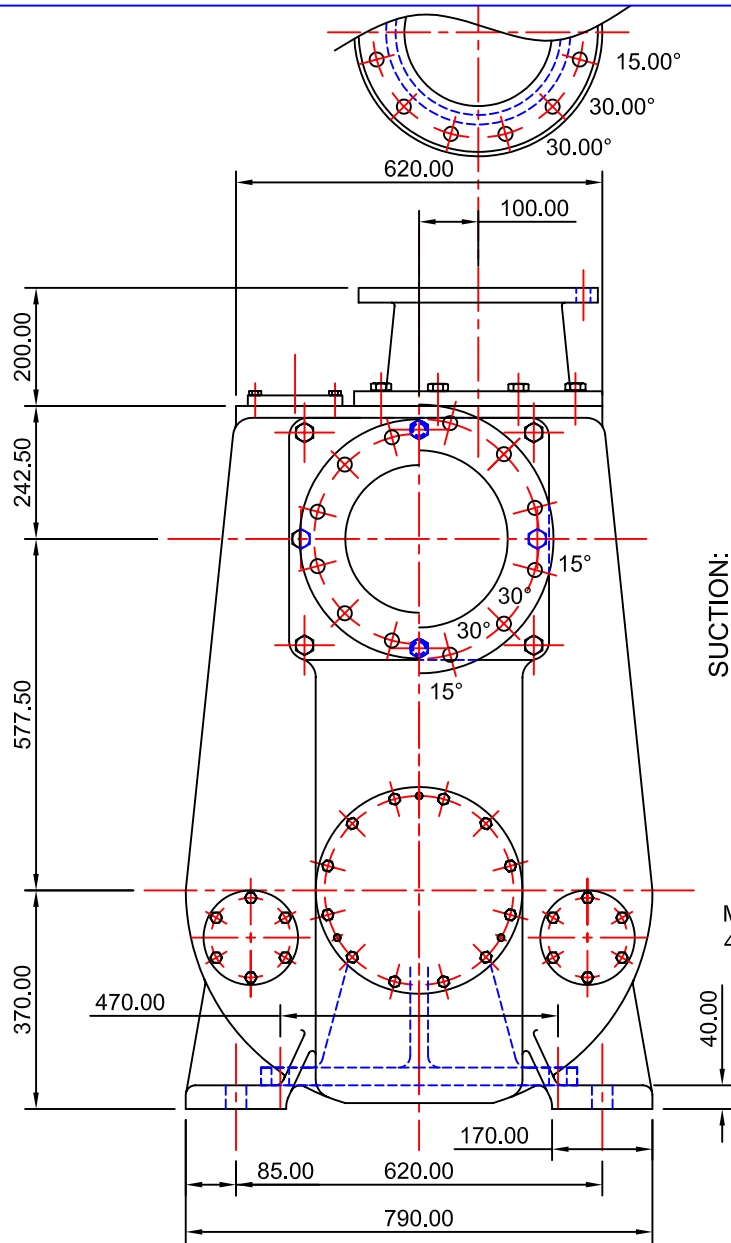

SUCTION:

- A) 300mm AS2129 "E"
12 - 28Ø HOLES E/S ON 406 PCD (455Ø FLANGE).
- B) 250mm AS2129 "E"
12 - 24Ø HOLES E/S ON 356 PCD (405Ø FLANGE).

MOUNTING HOLES
4 - 35Ø HOLES

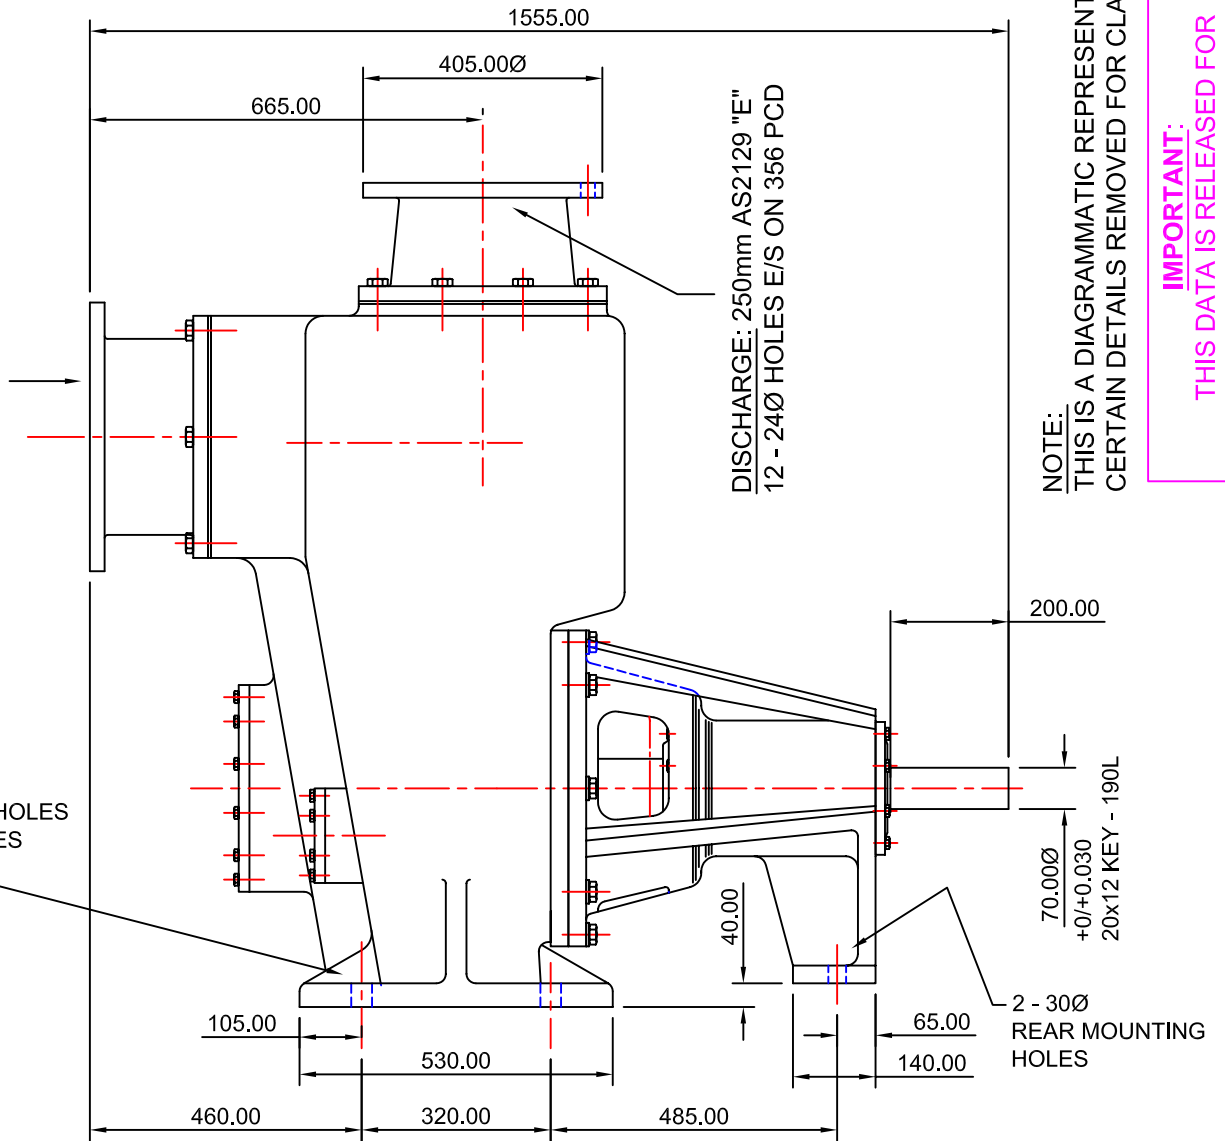

DISCHARGE: 250mm AS2129 "E"
12 - 24Ø HOLES E/S ON 356 PCD

NOTE:
THIS IS A DIAGRAMMATIC REPRESENTATION
CERTAIN DETAILS REMOVED FOR CLARITY.

IMPORTANT:
THIS DATA IS RELEASED FOR
REFERENCE ONLY.

REVISION	THIS DATA REMAINS THE PROPERTY OF STALKER ENGINEERING. NO DATA MAY BE REPRODUCED WITHOUT PRIOR CONSENT OF COMPANY. DATA MAY BE ALTERED WITHOUT NOTIFICATION.		GENERAL TOLERANCES METRIC +/-0.400mm IMPERIAL +/-0.015"		DRWN: AR	 STALKER PUMPS www.stalkerpumps.com.au DIMENSION OUTLINE DIAGRAMMATIC 250300 APR DC SERIES STALKER BUILD HEAVY DUTY PEDESTAL (SPISOHD)	DRAWING No: 250300APRDCDIMA3	A3
	AS1100 3rd ANGLE PROJECTION		REFERENCE: ORIG. FILE REF. 05/03/2003		DATE: UPDATED 16/09/2004			
	DO NOT SCALE		APPRVD:		SCALE: DIAGRAMMATIC			
			CHECKED:		FILE REF: REFER DWG NUMBER			